


PRODUCT DATA SHEET

FPF.BK (.WH)
BLACK / WHITE POLYURETHANE

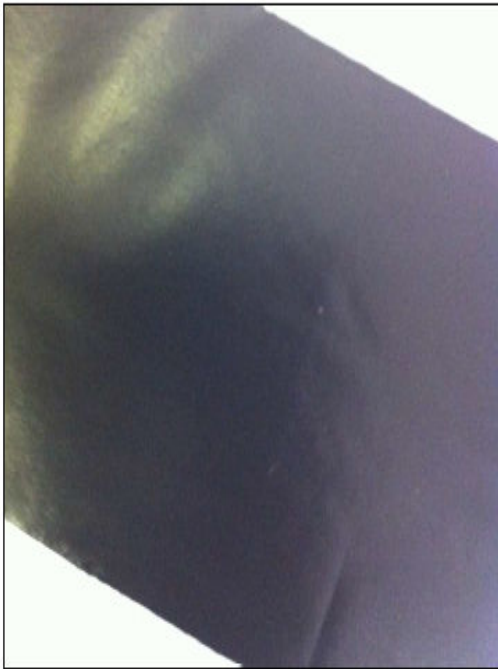

GENERAL

The film is noted for the following properties:

- High abrasion resistance
 - Flexibility over a wide temperature range
 - High resistance to oils, greases and solvents
 - Good resistance to weather exposure
 - Good resistance to high energy radiation
- Free of plasticisers
 - Good resistance to liquids but still high water permeability
 - Good bonding to foam

TECHNICAL DATA

Type	Average Value (25my)	Test Method
Density:	1.23 g/cc	DIN 53479/54
Melting Range:	145-155C	DSC UNI EN ISO 11357-1
Tensile strength	25 N	ISO 527-3/2/200
Elongation at break	480%	ISO 527-3/2/200
Modulus 100%	4N	ISO 527-3/2/200
Modulus 300%	11N	ISO 527-3/2/200
Tear resistance:	85 N/mm	DIN 53515/90